

BRUMMER**· STOPPING ·
EXTERIOR WOOD FILLER 225g^e**

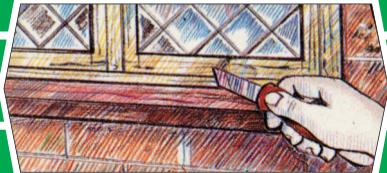
UN No. 1325

FLAMMABLE SOLID • CAUSES SKIN IRRITATION • HARMFUL IN CONTACT WITH SKIN •
HARMFUL IF INHALED • MAY CAUSE DROWSINESS OR DIZZINESSREAD LABEL BEFORE USE • KEEP OUT OF REACH OF CHILDREN • KEEP CONTAINER
TIGHTLY CLOSED • USE ONLY OUTDOORS OR IN A WELL VENTILATED AREA • KEEP AWAY
FROM HEAT AND OPEN FLAMES – NO SMOKING • WEAR PROTECTIVE GLOVES AND EYE
PROTECTION • IF ON SKIN: WASH WITH PLENTY OF SOAP AND WATER • IF IN EYES:
RINSE CAUTIOUSLY WITH WATER FOR SEVERAL MINUTES, REMOVE CONTACT LENSES
IF PRESENT AND EASY TO DO - CONTINUE RINSING • IF MEDICAL ADVICE IS NEEDED:
HAVE PRODUCT CONTAINER OR LABEL
AT HAND**WARNING**

Contains:

xylene - Index 601-022-00-9

n-butyl acetate - Index 607-025-00-1

Clam-Brummer Ltd, PO Box 413, Hatfield AL10 1BZ Tel: 01707 274813
email: sales@woodfillers.co.uk**BRUMMER****· STOPPING ·
EXTERIOR WOOD FILLER****DIRECTIONS**Brummer Green Label Wood Filler is available in a wide range of
colours to suit most applications. Waterproof and impervious to
sea water, suitable for marine use. May be drilled, sanded etc.
when set. May be used under nearly all types of exterior
finish including varnish, lacquer, paint etc.To fill small holes or cracks use a clean palette knife or similar
utensil. Apply firmly but leave a little proud. Allow to dry and sand
off any surplus. Deep holes or cracks should be filled in layers,
allowing each one to dry before applying the next. If stiff, or hard
in tin, soften with a little paint thinners.Use methylated spirits or paint thinners to clean tools.
Always try a sample area first with the appropriate finish.**www.woodfillers.co.uk**