

Quick
Dry


Rustins

EST 1924

Floor Paint

For concrete, brick, stone & wood

Rustins Quick Dry
Floor Paint - The perfect
long lasting paint finish for
concrete, brick and stone
floors - garages, utility rooms,
porches and patios.

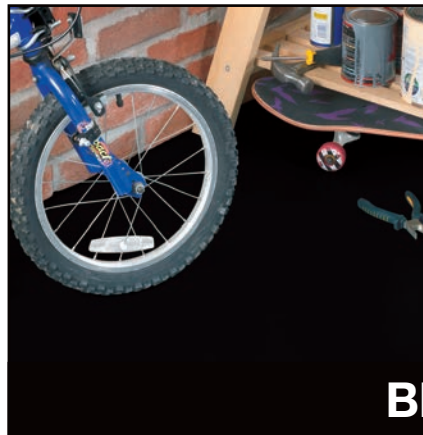

Black



Touch dry in
30 minutes

Clean brushes
in water

Also available
in Red & Grey

For interior & exterior use

STIR WELL BEFORE USE

Rustins Floor Paint is hard wearing, based on a high quality waterborne acrylic emulsion. It is non-flammable with a low odour that can be used for interior & exterior applications.

Preparation

The floor must be clean and free from wax, grease and dust. If applying over a previously painted floor, remove flaking paint with a scraper or completely with Strypit Paint and Varnish Stripper. Grease or oil on a concrete garage floor can be removed by washing with a strong detergent and a stiff brush. Any cracks in the garage floor can be repaired with mortar. Unlike conventional paints, Rustins Floor Paint can be applied over new concrete. If applying to interior or exterior concrete ensure that the concrete is dry and that there is no dampness rising through the concrete. Rising damp can cause adhesion failure. Efflorescence and alkaline salts that form under the coating because of damp can cause adhesion failure. If in doubt carry out a test. Always dilute the first coat by 50% with water to act as a sealer. Two further undiluted coats will be required. If applying to a wooden floor, remove all traces of wax polish which may have been applied, with wire wool and White Spirit, wiping off the solution formed with clean rag. Large cracks or holes can be filled with Rustins Woodfiller. It should not be applied at temperatures below 5°C or in high humidity

Application

Stir well before and during use. Do not use less than the recommended coverage. Do not pour paint into an un-lacquered metal container; use a glass or polythene container. Apply liberally with a large brush or roller. The paint will be touch dry in approximately 30 minutes depending on temperature and humidity. If required, a second coat can be applied after 4 hours. Two coats are normally sufficient, but further coats can be applied if used in an area subject to high traffic. Floors can be walked on after 8 hours, but should not be subject to heavy wear for 24 hours.

Re-coating Time

The paint will be touch dry in approximately 30 minutes depending on temperature and humidity and can be re-coated after a minimum of two hours.

Coverage

This tin will cover approximately 25 sq.m in 1 coat depending on the absorbency of the surface.

Cleaning

Remove as much paint as possible and return to this container. Brushes should then be cleaned immediately with water. If the brushes become hard, they may be cleaned with Rustins Brush Restorer or Rustins Cellulose Thinners.

Maintenance

Wash the floor with a damp cloth or mop. If after some time, the floor shows signs of wear, re-apply as above.

Disposal (pollution prevention)

Some local authorities have special facilities for disposal of waste paints/varnishes /coatings. Do not empty product into drains or watercourses.

Storage

Store in a cool dry place with the lid tightly closed. Protect from frost.

HEALTH AND SAFETY

Contains 5-CHLORO-2-METHYL-2H-ISOTHIAZOL-3-ONE. May produce an allergic reaction. May cause an allergic skin reaction. Keep out of reach of children. Avoid breathing dust/fume/gas/mist/ vapours/spray. Wear protective gloves/ protective clothing/eye protection/face protection/hearing protection. IF ON SKIN: Wash with plenty of water. If skin irritation or rash occurs: Get medical advice/attention. Dispose of contents/container to hazardous or special waste collection point, in accordance with local, regional, national and/or international regulation. *Warning! Hazardous respirable droplets may be formed when sprayed. Do not breathe spray or mist.*

UFI: GET0-POXT-N00E-69NJ


Please refer to Product Data Sheet for full information at www.rustins.co.uk

For information on Rustins' products visit our website at www.rustins.co.uk or contact us at Rustins Ltd, Waterloo Road, London, NW2 7TX United Kingdom rustins@rustins.co.uk
Tel: +44 (0)20 8450 4666

ROI: Excellence Ltd, 43 Grange Parade, Dublin D13 Y860 Ireland.
Tel: +353 1 - 832 3300



EU Limit value for this product (CAT A/d):
130g/l (2010)
This product contains max 74 g/l VOC

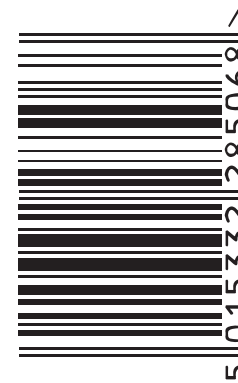

2.5 Litre e